




# Garmin Nuvi 680 Battery Replacement

A step-by-step guide to replacing the battery in the Garmin Nuvi 680.

Written By: Chris Marzano

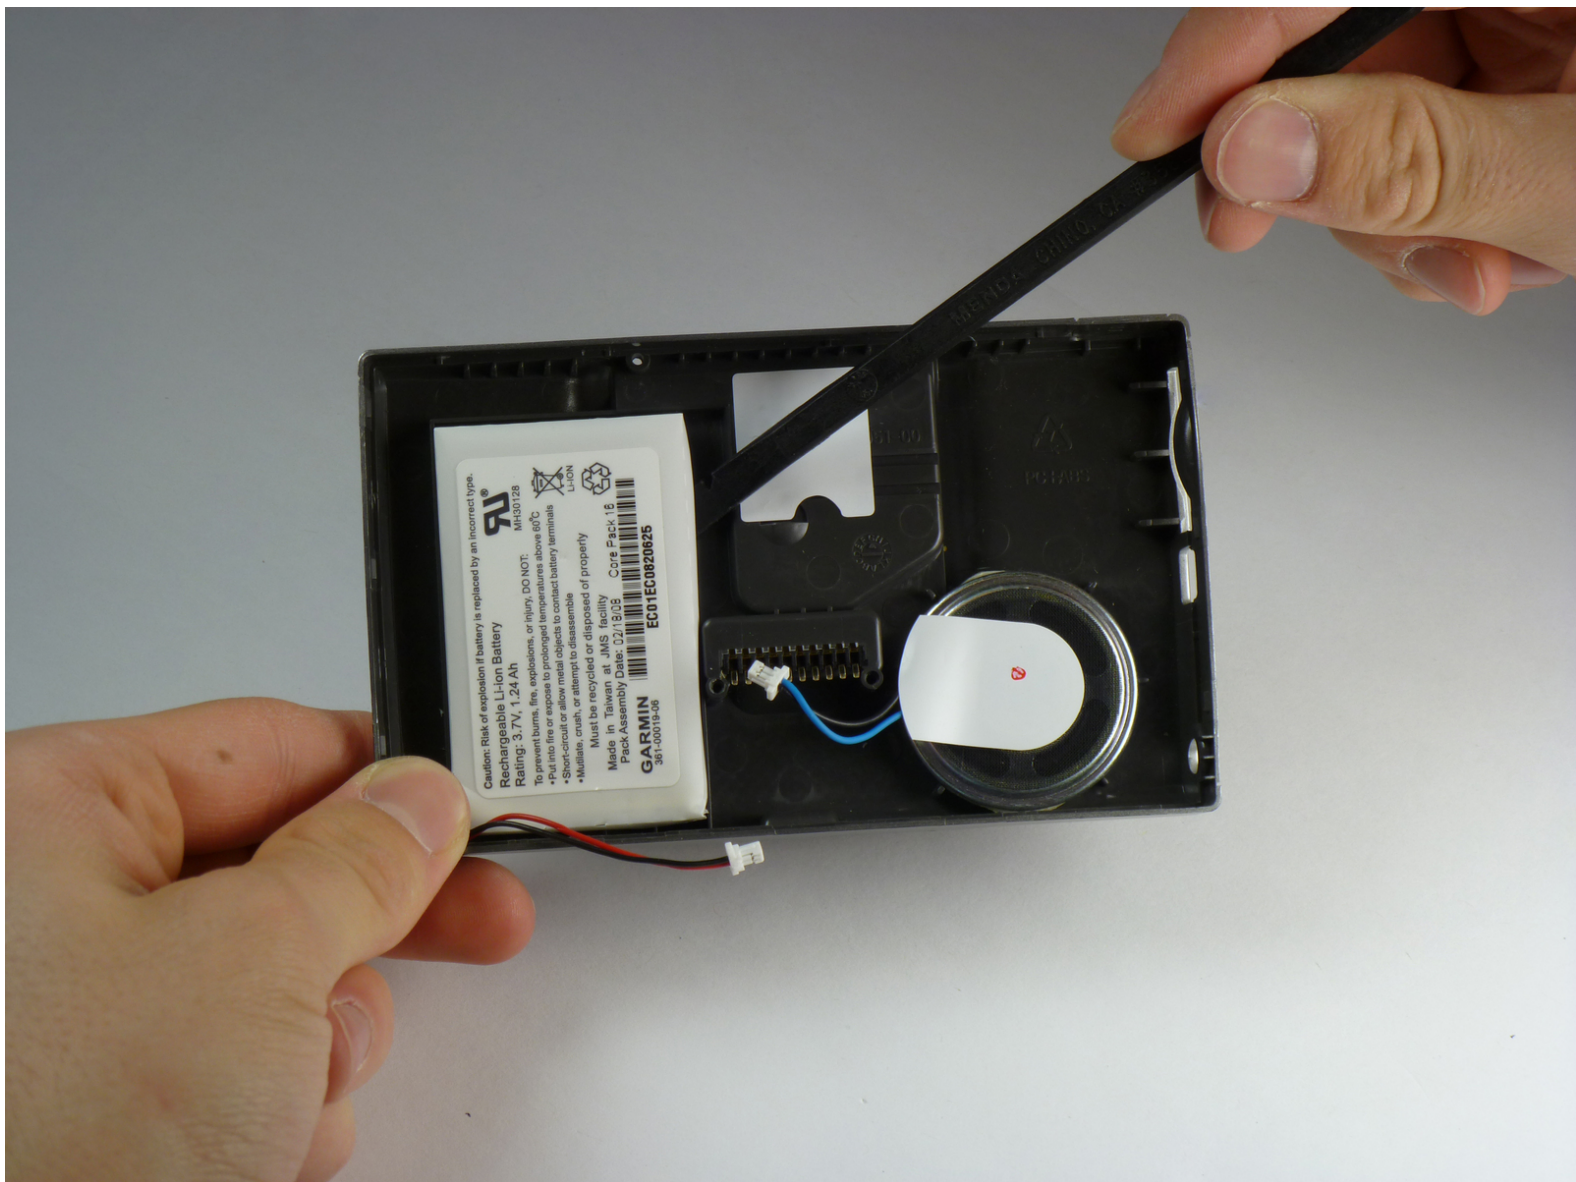

## INTRODUCTION


A step-by-step guide to replacing the battery in the Garmin Nuvi 680.

---

### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [T5 Torx Screwdriver](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Outer Case

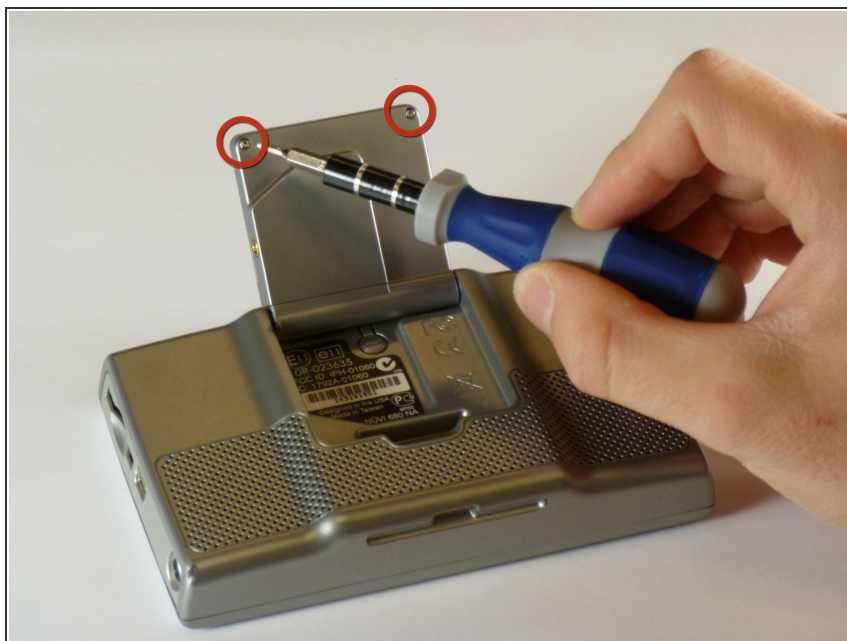

- Flip open the antenna on the back of the device.
- Remove the two screws on the antenna cover using a T5 Torx screwdriver.
- These screws are 4.42 mm long.


## Step 2




- Remove the antenna cover.



## Step 3


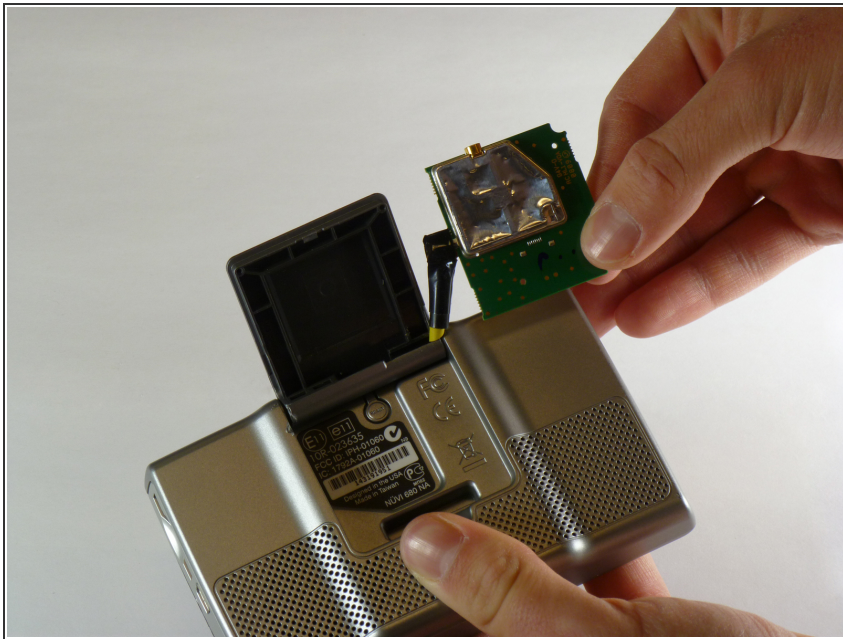


 The yellow wire is connected to the motherboard, so you cannot disconnect it until you finish opening the device.

- Pull the antenna circuit board out of its case.



## Step 4

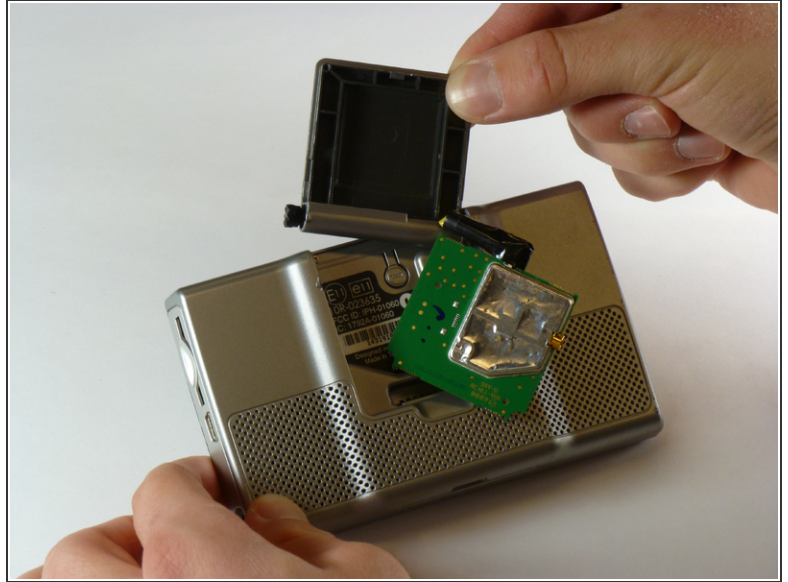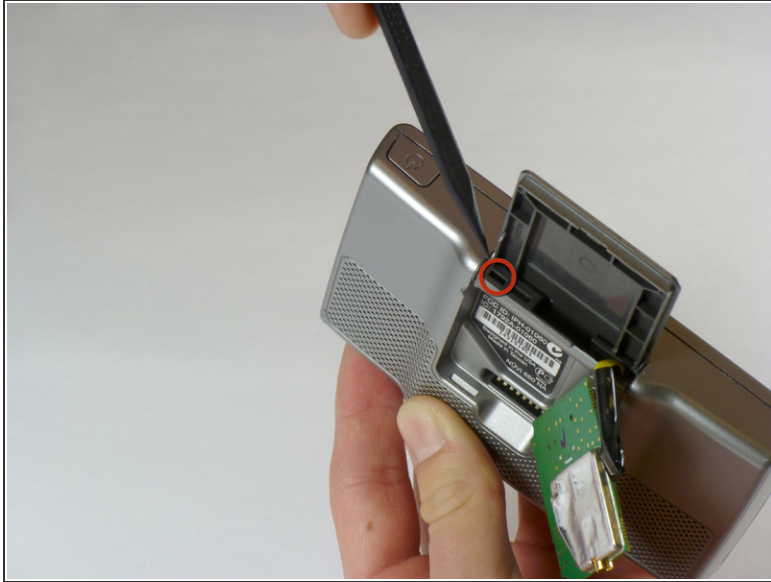


- Insert the pointed end of a spudger into the leftmost slit of the antenna case.
- Push the spudger to the right.

⚠ Slide the antenna case out slowly or you may lose the antenna's spring. The spring is inside the black plastic that holds the antenna case to the device.

- Slide the antenna case out of the device.
- ☑ Reinstallation tip: first reassemble the antenna casing (place antenna back into its plastic cover), and then re-insert the entire assembly back into the GPS body.


## Step 5

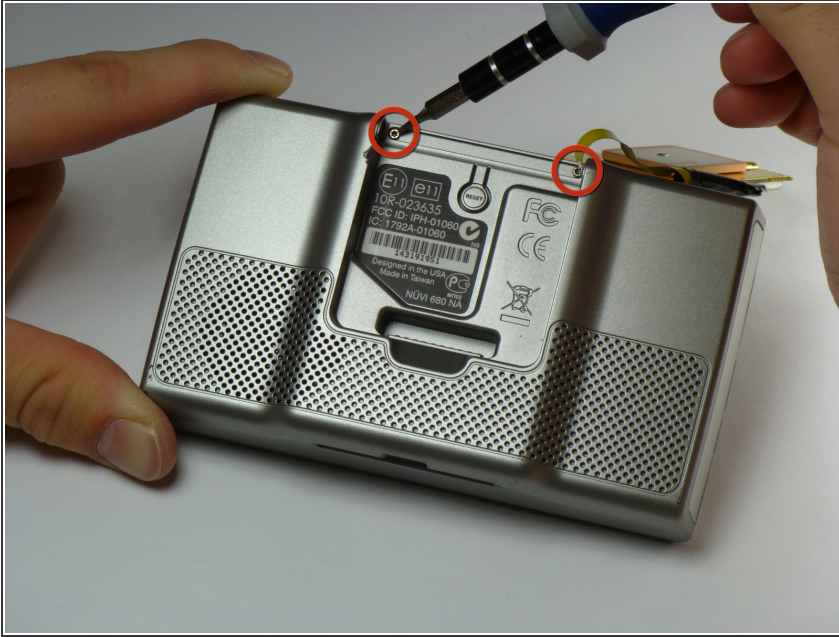

- Remove the two screws on the back of the outer case using a T5 Torx screwdriver.
- These screws are 10.82 mm long.

## Step 6





 Gently pull apart the front and back of the device. The front and back are still connected by ribbon cables.

- Starting along the top, separate the front and back of the device by pushing an iPod-opening tool into the crack along each side of the case.




## Step 7 — Antenna

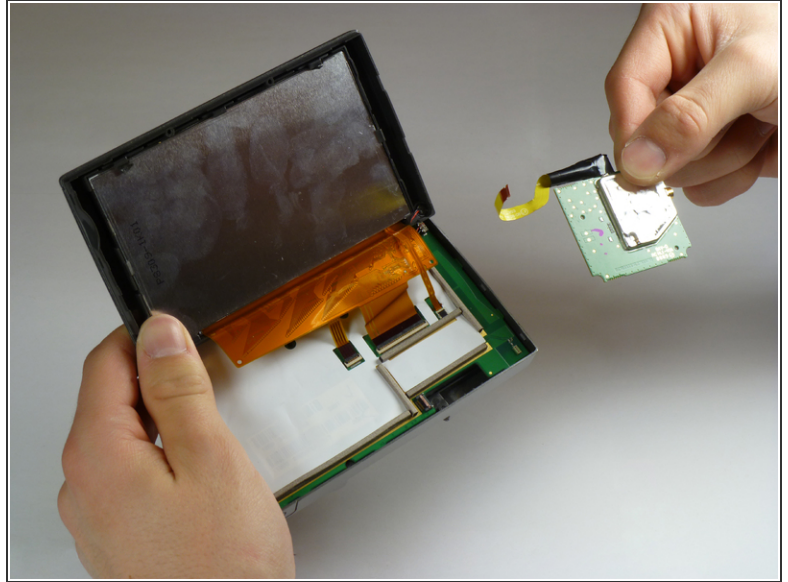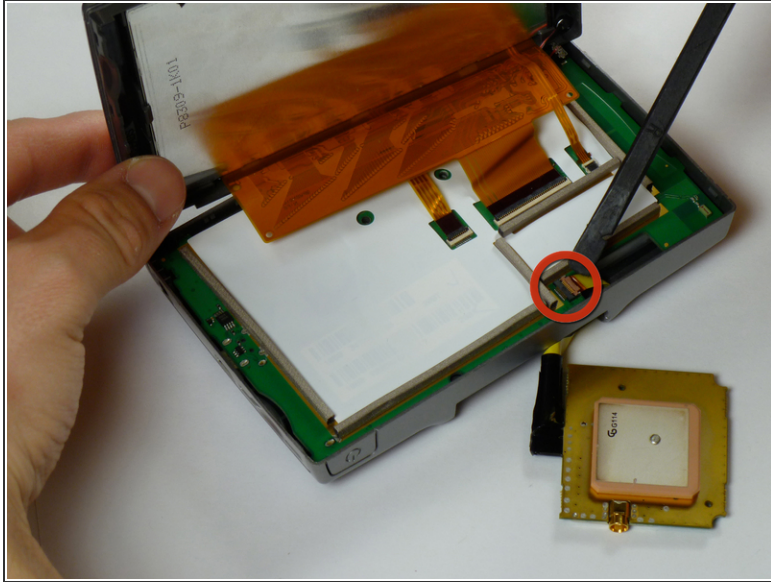

- Use a spudger to disconnect the yellow antenna wire from the ZIF connector on the back of the motherboard.
- Remove the antenna.





## Step 8 — Screen Wiring

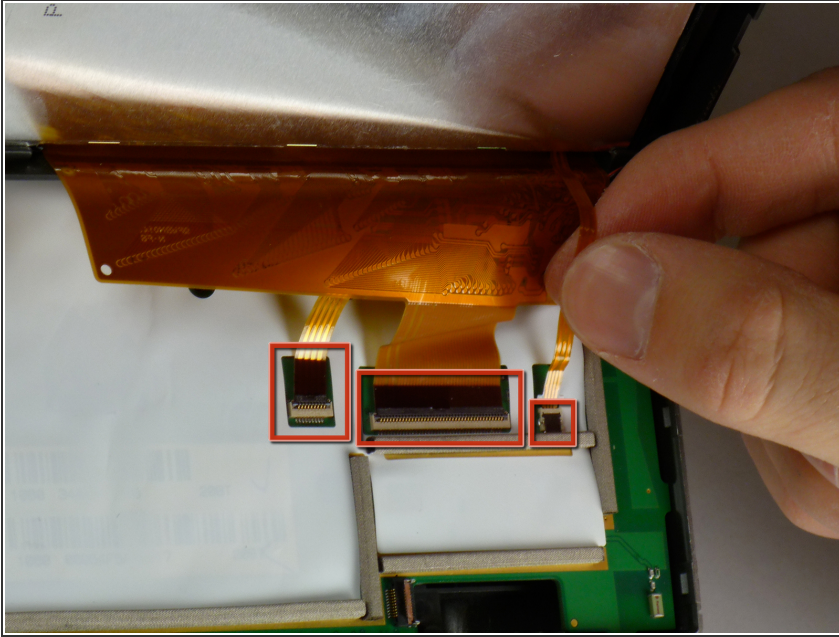


- ⚠ Do not remove the ribbon cables without lifting the latch or the cable will be damaged.
- Lift the latches on the ribbon cable connectors. All the ribbon cables may have latches. The right most latch may have a latch that flips in the opposite direction from the others.
- Gently pull the ribbon cables out of their connectors. They should slide out easily.
- ⚠ Do not separate the two halves of the device yet or the on/off cable may be severed.

## Step 9

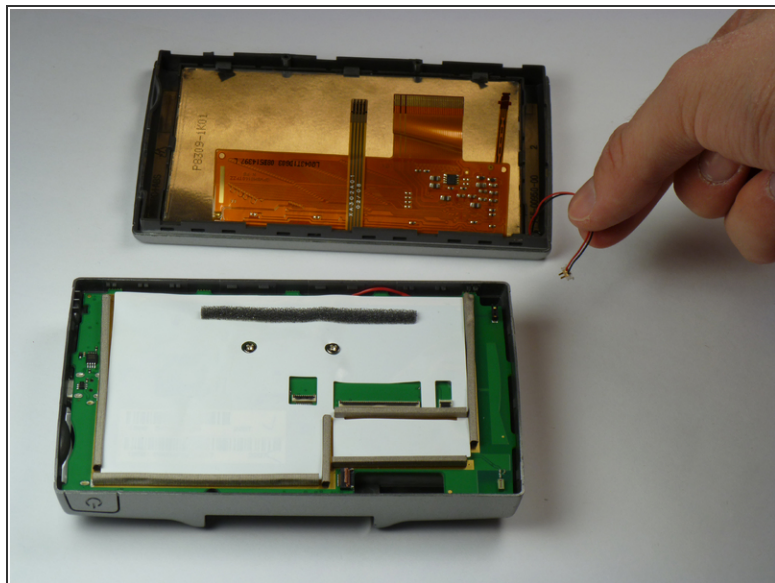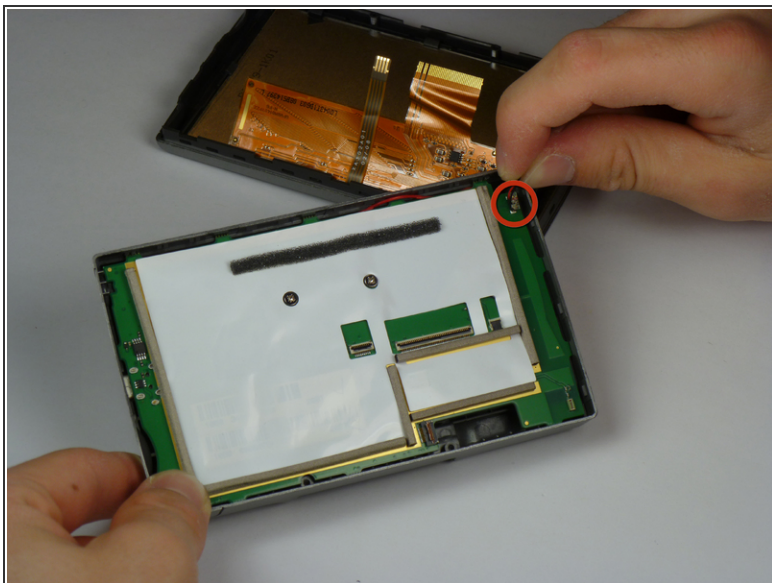

- Gently pull the cable for the on/off button straight up to remove it.
- The two halves of the device may now be separated.



## Step 10 — Motherboard

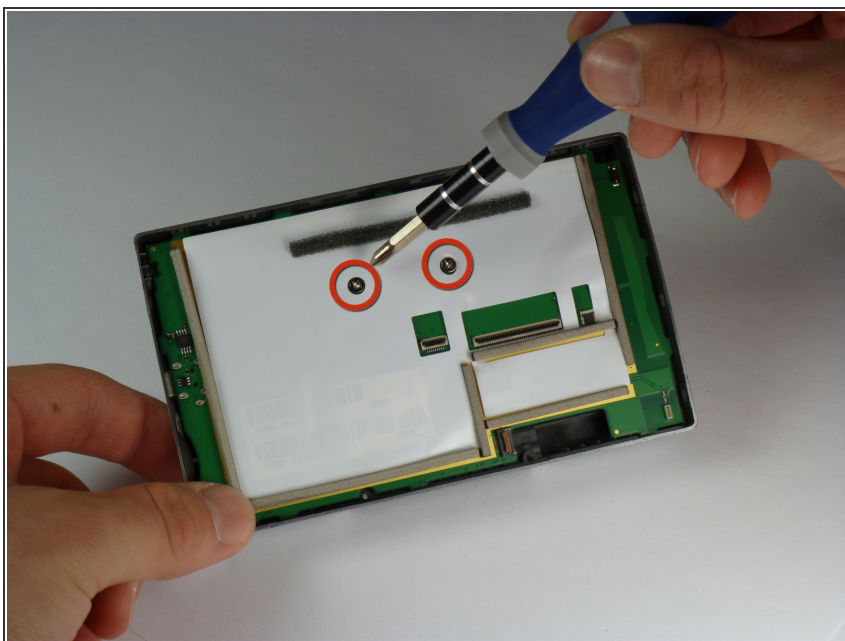

- Use a PH1 sized Philips screwdriver to remove the two screws shown.
- These screws are 6.88 mm long




## Step 11

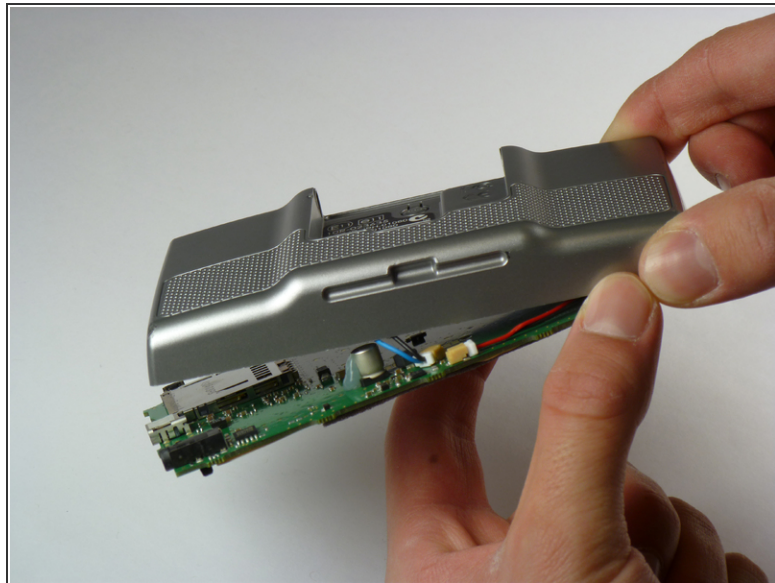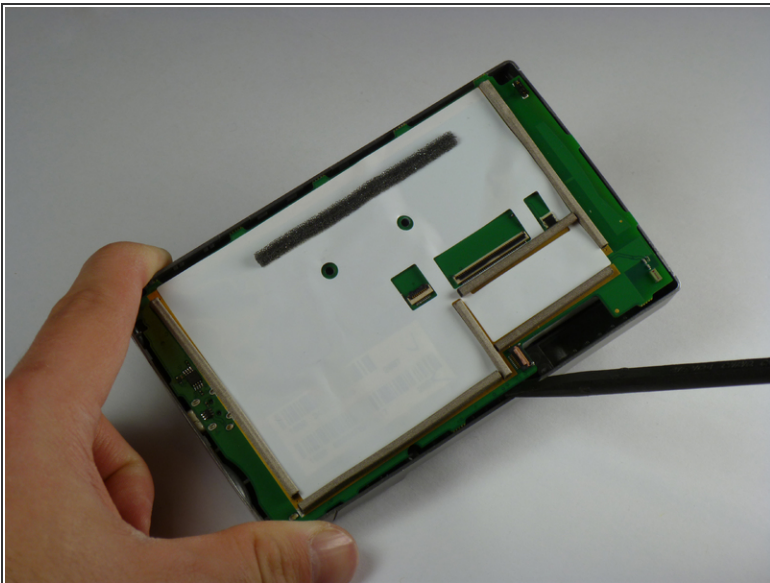

⚠ Carefully separate the motherboard from the outer case or the speaker and battery cables may be damaged.

- Use a spudger to lift the edge of the motherboard.


## Step 12

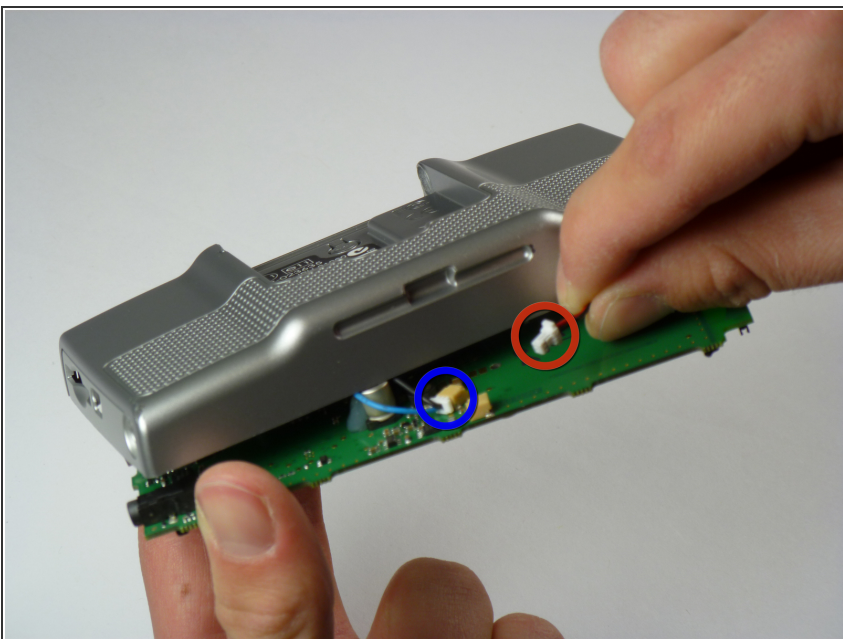

- Gently unplug the cable for the battery
- Gently unplug the cable for the speaker.





## Step 13

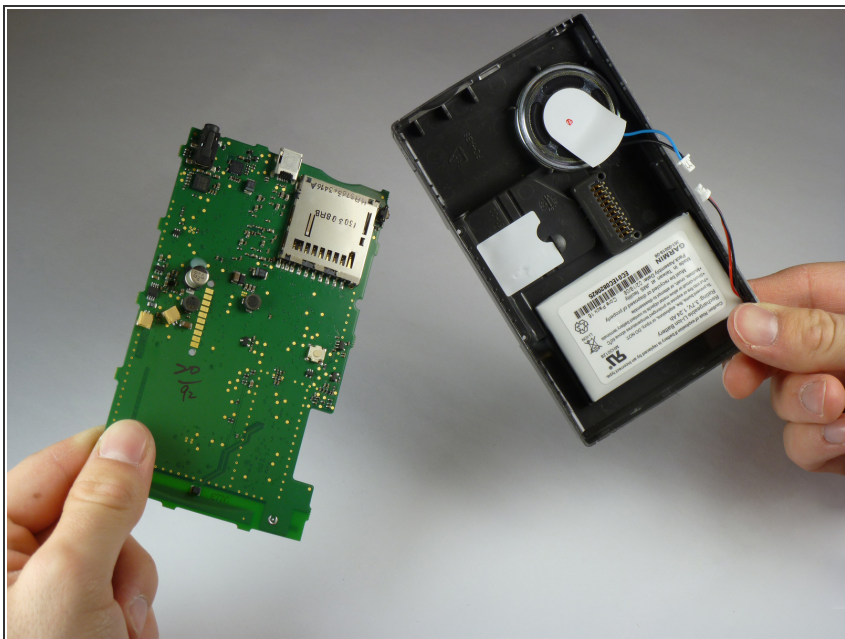

- Lift the motherboard out of the outer case.

## Step 14 — Battery

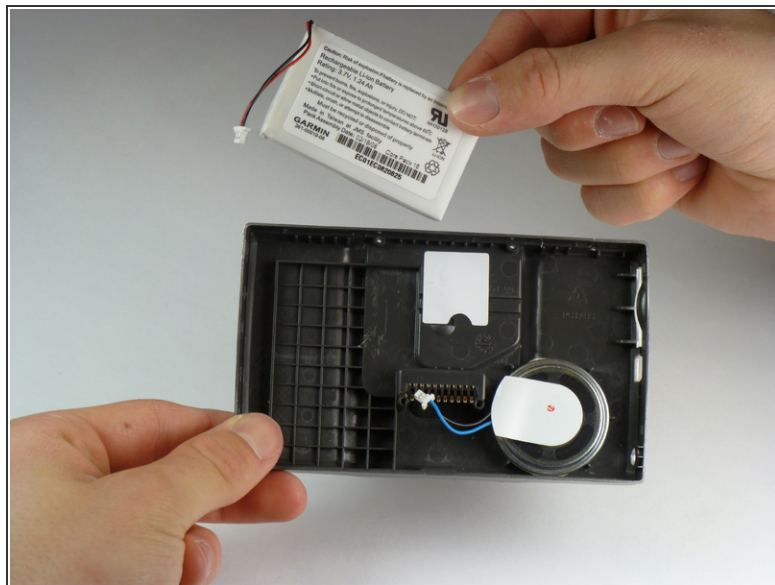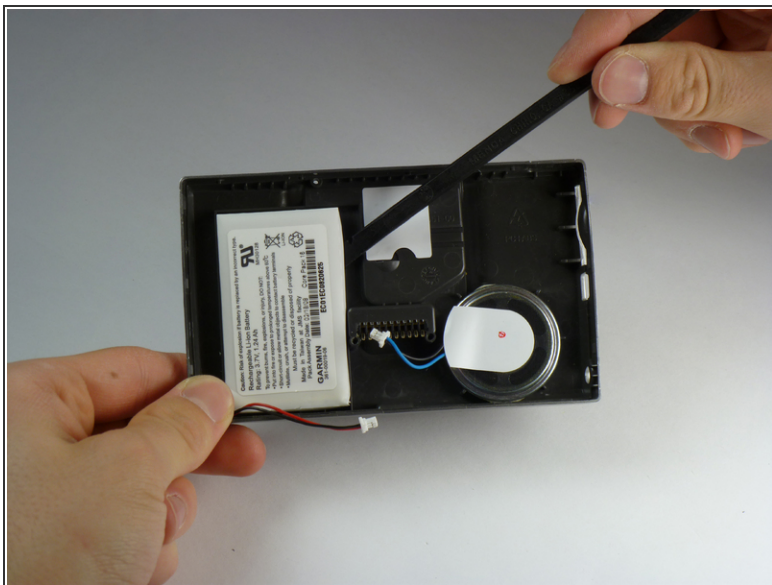

**i** The battery is difficult to remove because it's glued to the case.

- Use a spudger to gently pry the battery out of its slot.
- Remove the battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 01:24:43 PM.